

# GrecoFloor® Deko SF200

The innovation self-smoothing epoxy resin fashion floor system

## Description

**GrecoFloor Deko SF200** is a three component, solvent-free epoxy resin combined with special 'GRANUCOP' fillers flooring system. It is designed for applications with minimum thickness of 2.0mm.

## Uses

**GrecoFloor Deko SF200** is formulated to produce a seamless and durable coating for concrete surface. The cured coating gives a smooth, easy cleaning and aesthetic surface, with excellent mechanical wear and abrasion resistance.

It is recommended for light to medium duty floor areas such as showroom, office, trendy shop, workshop, laboratory, production floor, etc.

**GrecoFloor Deko SF200** is available in the following standard blends with smooth, glossy appearance and matt finish.

## Advantages


- Excellent abrasion resistance
- Amazing combinations of surface and colours can be achieved to suit owners, designer and specifiers.

## Typical Performance Data

After 7 days cure @ 30 °C

Compressive strength (ASTM C349)	: > 60 N/mm <sup>2</sup>
Flexural strength (ASTM C348)	: > 25 N/mm <sup>2</sup>
Adhesion strength (pull out) (ASTM D4541)	: > 1.0 N/mm <sup>2</sup> Concrete Failure
Service temperature	: -20°C to 60°C

**GrecoFloor Deko SF200** is available in the following standard blends with smooth, glossy appearance and matt finish.

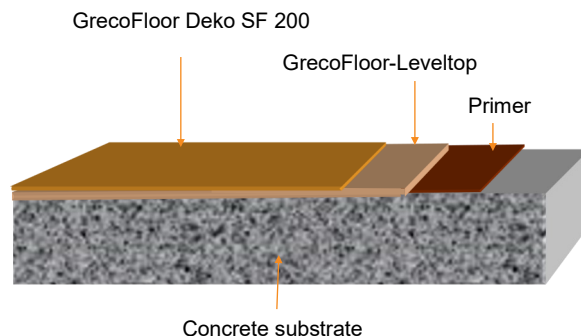

## Application

**GrecoFloor Deko Flooring system** shall be mixed and applied only by specialist trained applicator.

## Note:

Use the leaflet as a guide for the use of this product concerned. The information given is in accordance with the latest technical developments. However, we cannot accept responsibility for any work carried out with our materials as we have no control over the method of application used or the condition of the site involved.

Last updated by KH/Mar2017

